NEW! New Holland 400GM Series Flex-Wing Finishing Mower



410GM 420GM 430GM



The New Rear Discharge Flex-Wing Finishing Mower series has been designed for golf courses, parks, or large areas. Each model features 3 floating decks with 4 wheels on each deck.

3 different cutting widths are available: 12′, 15′, or 17′. The Rear Discharge Flex-Wing finishing mower is designed to provide precise mowing and a smooth clean cut. Wing decks flex front to rear and side to side during working for better mowing on uneven terrain.

Cutter blades are made from special steel with high suction for grass lifting and a clean finish.

Excellent cutter heads overlap for 100% cutting, providing a clean finish cut every time you mow.

A mulching kit is available as optional equipment.

Standard features include:

- Hydraulic fold for easy transport and storage
- Spacers for quick and easy height adjustment on each deck
- Independent floating decks for precise cutting on uneven terrain
- Front Rollers
- · Chain guards


Flex-Wing Finishing Mower is fitted with a tie rod system. While in transport position, the tie-rod system automatically keeps the side mowers in vertical position.

The adjustable hitch allows height adjustment to fit different types of tractors.

Transport latching mechanism automatically engages when decks are raised into transport position. Simply pull the release rope to lower the decks.

New Holland 400GM Series Flex-Wing Finishing Mower Specifications

| Model Package | 410GM 100 | 420GM 200 | 430GM 300 |
|--------------------------------|---------------|---------------|---------------|
| Size, in. | 60 | 72 | 90 |
| Specifications | | | |
| Overall cutting width, ft. | 12 Flex | 15 Flex | 17 Flex |
| Center deck cutting width, ft. | 5 | 6 | 7.5 |
| Wing deck cutting width, ft. | 4 | 5 | 6 |
| Deck overlap, in. | 6 | 6 | 12 |
| Overall width, in. | 146 | 182 | 207 |
| Transport width, in. | 100 | 101 | 102 |
| Maximum overall length, in. | 182 | 185 | 196 |
| Transport length, in. | 177 | 180 | 188 |
| Transport height, in. | 90 | 100 | 110 |
| Min. HP | 30 | 35 | 40 |
| Cutting height range, in. | 1 to 5 | 1 to 5 | 1 to 5 |
| Blasé tip speed, FPM | 16,000 | 16,000 | 16,000 |
| Caster wheels, 12 | 15 x 6.00-6 | 15 x 6.00-6 | 15 x 6.00-6 |
| Transport tires, 2 | 26 x 12.00-12 | 26 x 12.00-12 | 26 x 12.00-12 |
| Approx. weight, lbs. | 2600 | 2800 | 3100 |

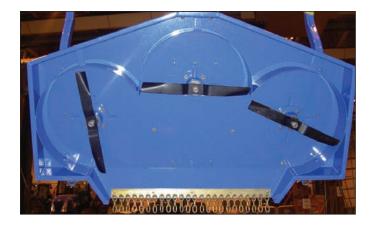



YOUR NEW HOLLAND DEALER



Visit our Web site at www.newholland.com/na Or, call toll-free: 1-888-290-7377

Design, materials and/or specifications are subject to change without notice and without liability therefor. Specifications are applicable to units sold in Canada, the United States, its territories and possessions, and may vary outside these areas.

Safety begins with a thorough understanding of the equipment. Always make sure you and your operators read the Operator's Manual before using the equipment. Pay close attention to all safety and operating decals and never operate machinery without all shields, protective devices and structures in place.